




225 200 175 → SMC 34, control → SMC 36, MSC 3 Layer smc, Mode 3 150 \_ **Temp** 125 100 Fig. 6 2 0.1000 0.0100 Loss Factor


225 200 175 → SMC 37, control → SMC 38, MSC Jelly rolled SMC, Mode 2 150 Temp 125 100 Fig. 7 20 0.1 0.01


Loss Factor

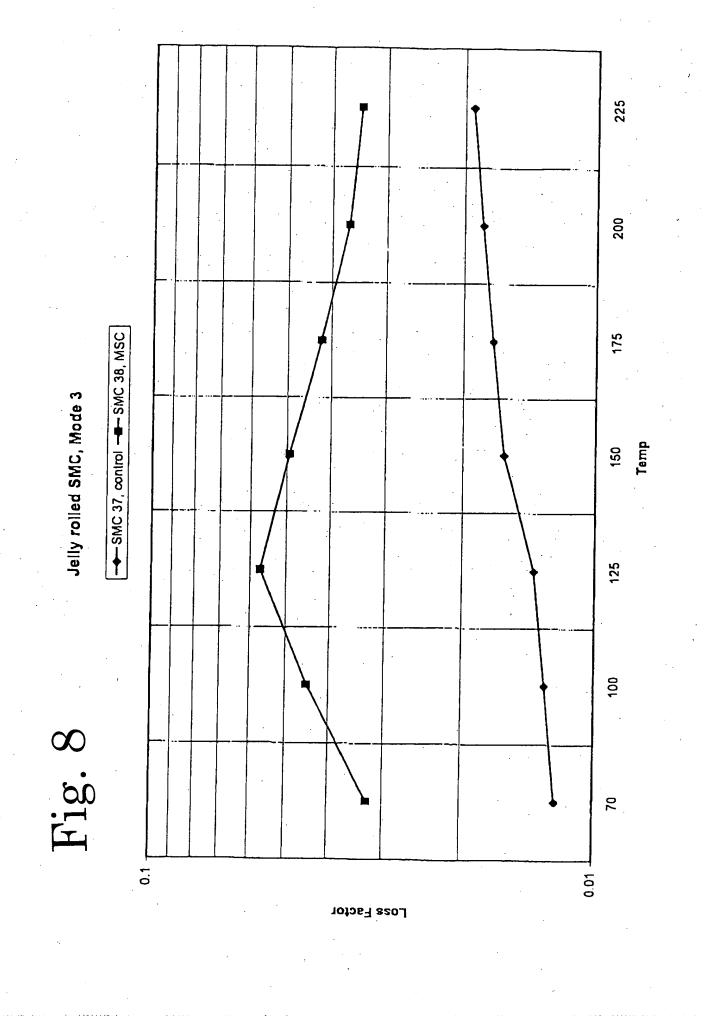


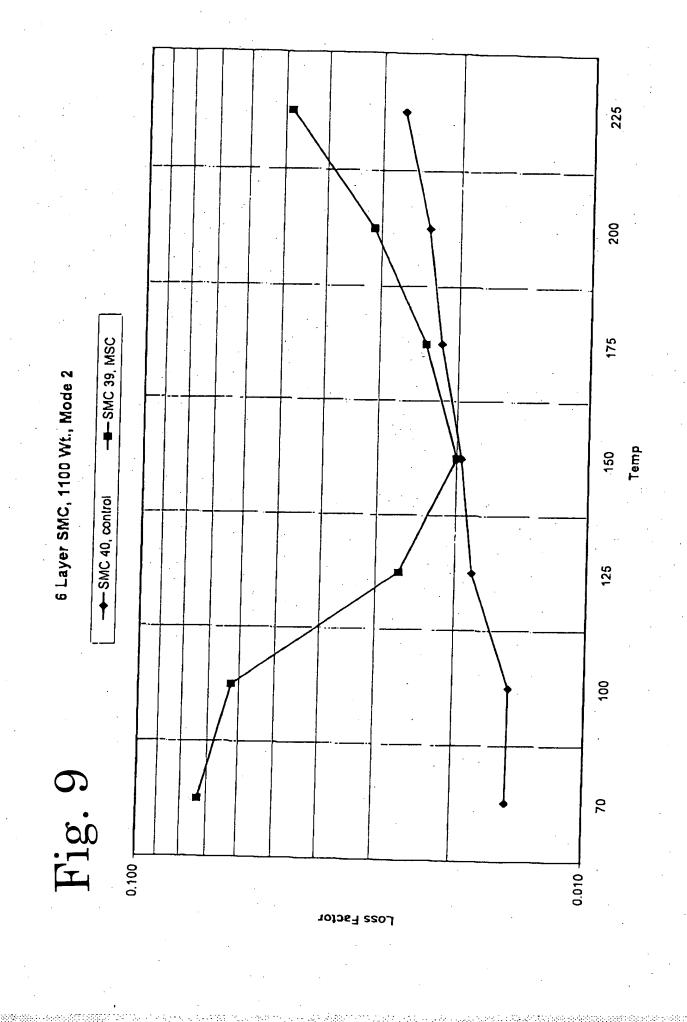

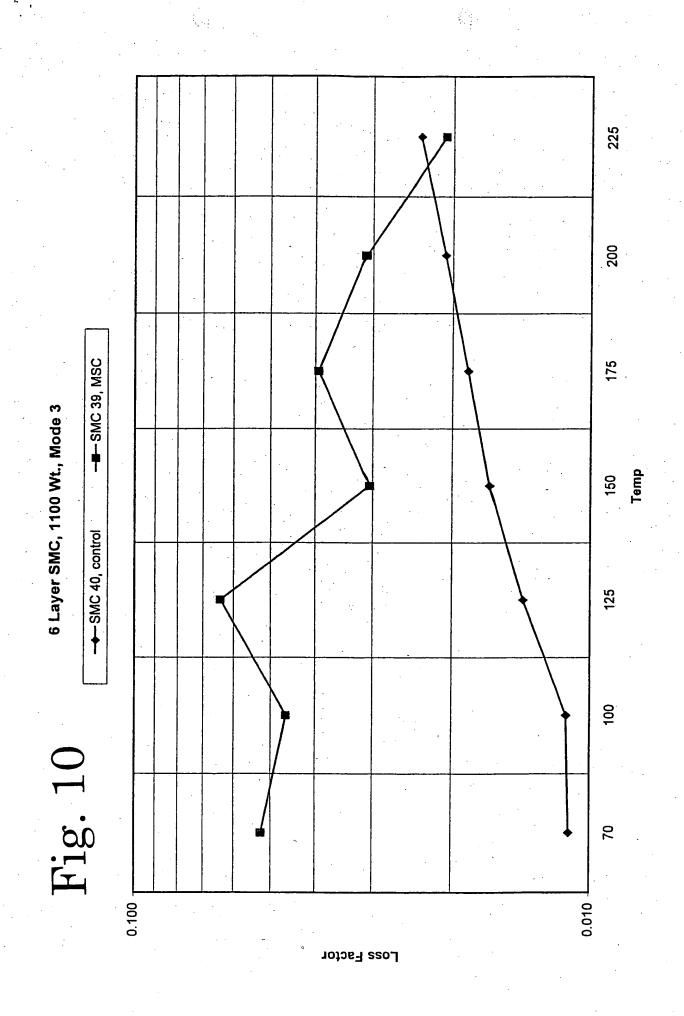


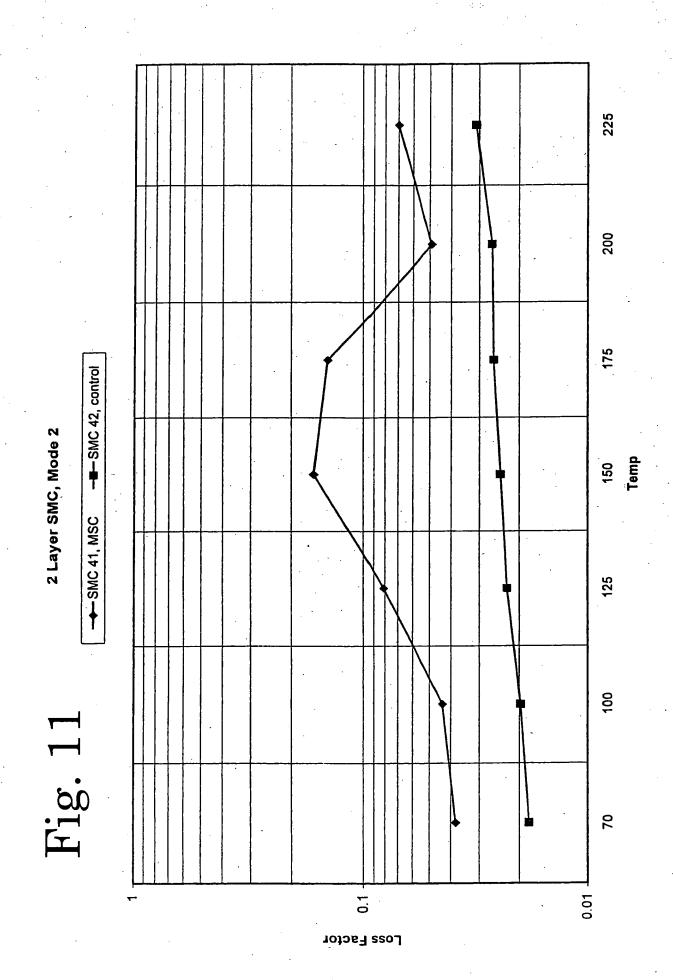

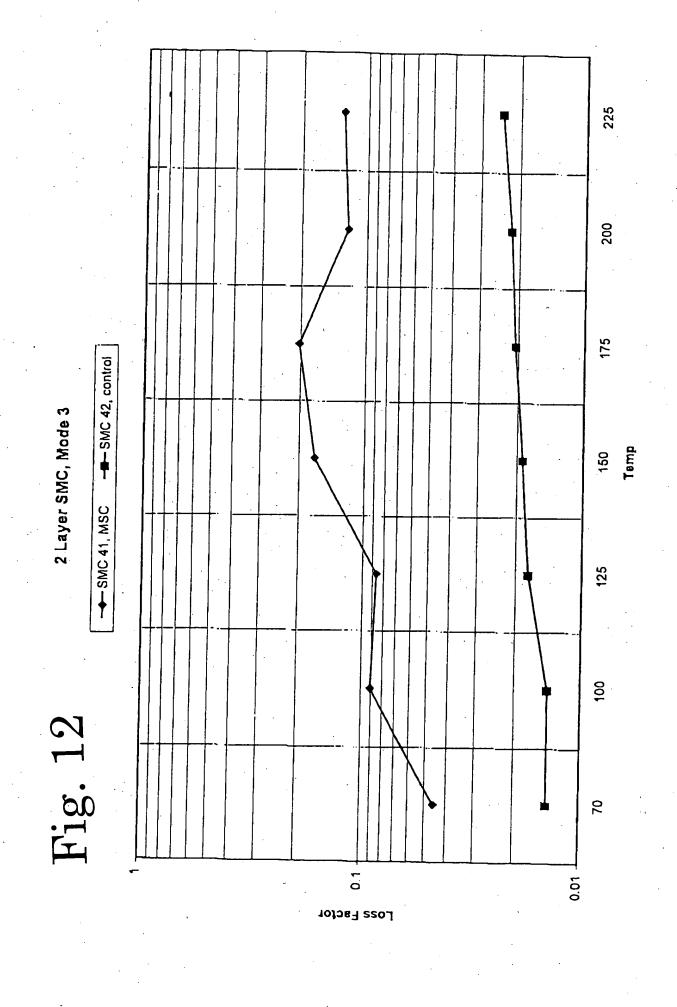

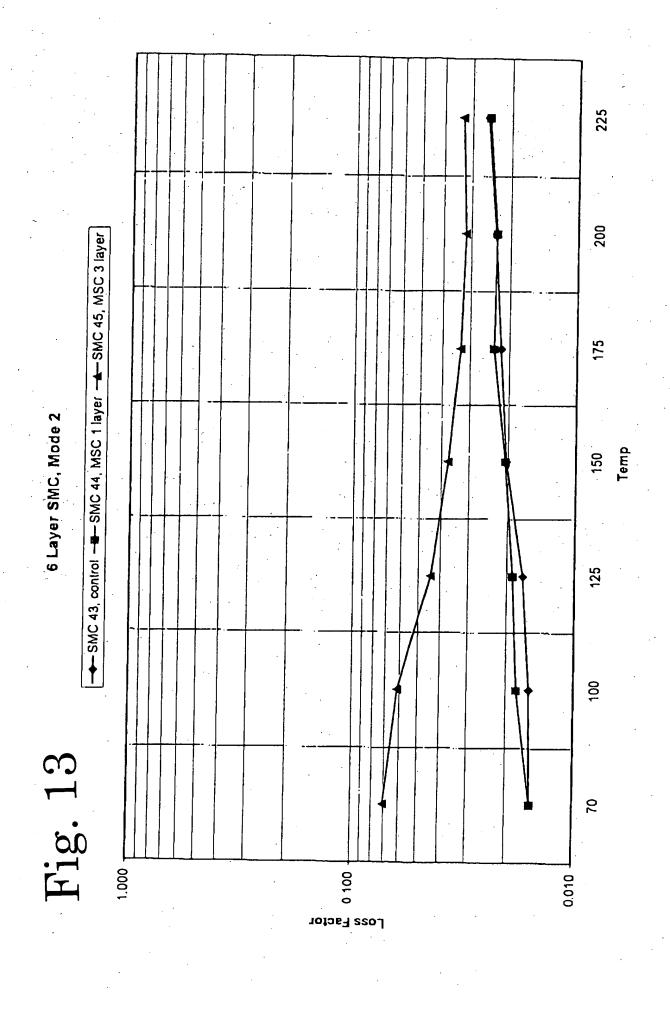

225 200 ---SMC 43, control ---SMC 44, MSC 1 layer ---SMC 45, MSC 3 layer 175 6 Layer SMC, Mode 3 Temp 150 125 100 Fig. 14 2 1.000 0.010 0.100 Loss Factor

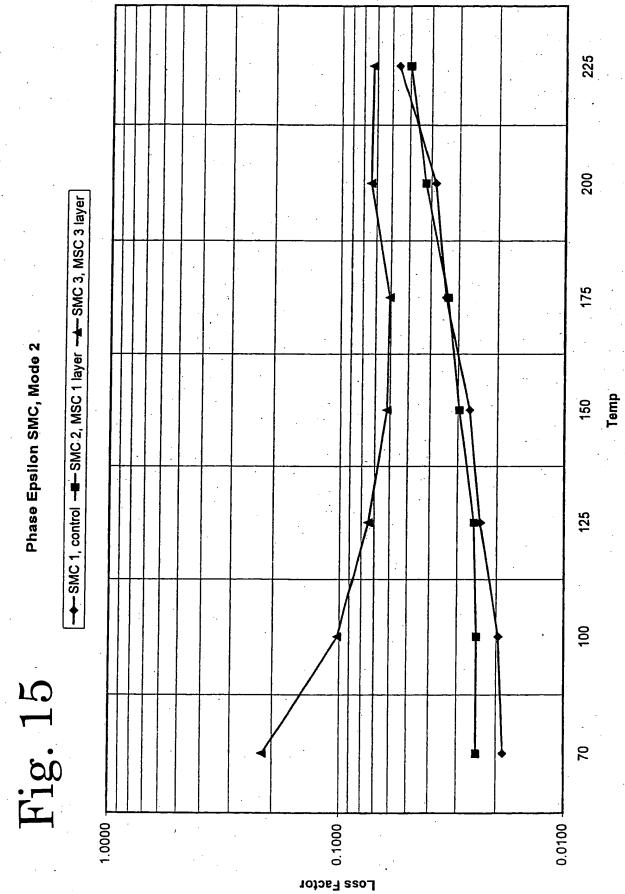

225 200 ---SMC 1, control ---SMC 2, MSC 1 layer ---SMC 3, MSC 3 layer Phase Epsilon SMC, Mode 3 Temp 150 125 100 Fig. 16 20 1.0000 T 0.1000 Loss Factor

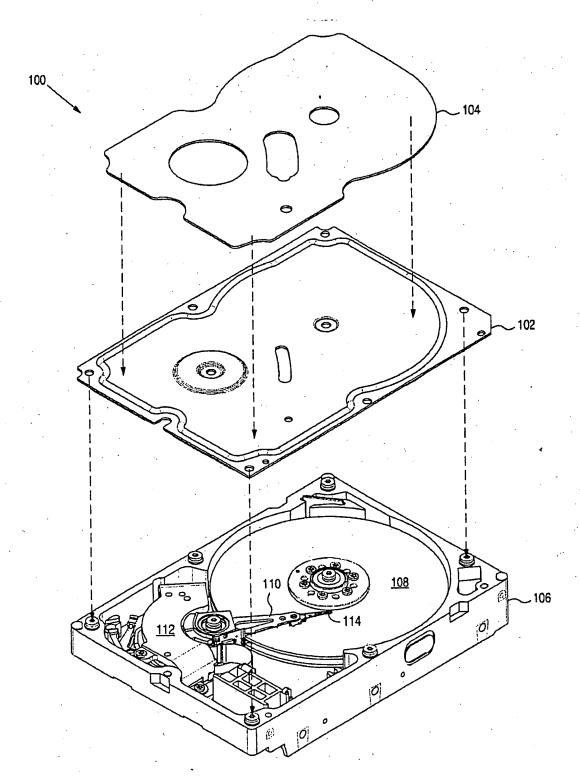


Fig. 17

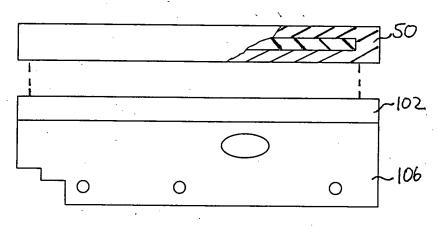


Fig. 18

